


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

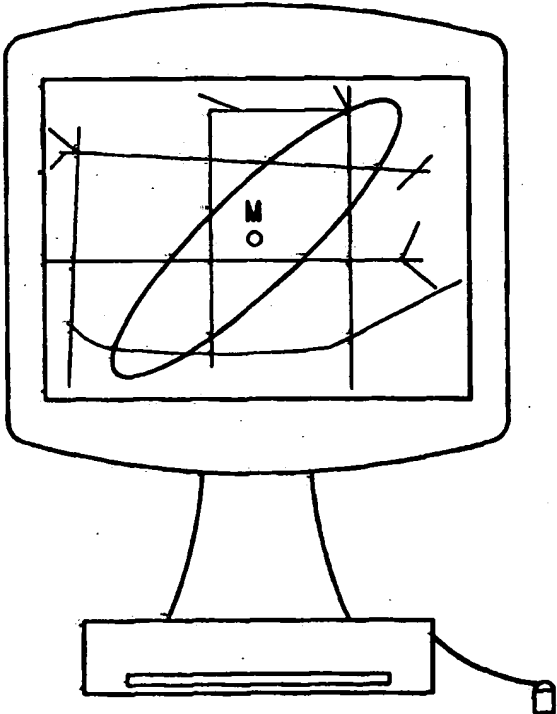

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : H04Q 7/38, 7/22</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/07177 (43) International Publication Date: 11 February 1999 (11.02.99)</p>
<p>(21) International Application Number: PCT/US98/15941 (22) International Filing Date: 30 July 1998 (30.07.98) (30) Priority Data: 08/903,551 30 July 1997 (30.07.97) US (71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: YOST, George, P.; 549 North Parks Drive, DeSoto, TX 75115 (US). PANCHAPAKESAN, Shankari; 5155 Verde Valley Lane #1920, Dallas, TX 75240 (US). (74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: SYSTEM AND METHOD USING ELLIPTICAL SEARCH AREA COVERAGE IN DETERMINING THE LOCATION OF A MOBILE TERMINAL</p> <p>(57) Abstract</p> <p>A system and method for improving the accuracy of a location measurement within a telecommunications system is disclosed. An elliptical search area is defined about an estimated mobile terminal location within the telecommunications system. The elliptical area is an optimum area for locating the mobile terminal, with size, eccentricity, and orientation of the ellipse being determined by the configuration of base stations, the mobile terminal's position, a desired probability of coverage, and the known measurement errors in the quantities measured by the ALI technique.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

SYSTEM AND METHOD USING
ELLIPTICAL SEARCH AREA COVERAGE
IN DETERMINING THE LOCATION OF A MOBILE TERMINAL

5 BACKGROUND OF THE PRESENT INVENTION

Field of the Invention

The present invention is directed to a system and method for improved mobile telephone location, particularly, to a system and method for identifying an
10 elliptical area about an estimated mobile telephone location within a telecommunications system, the elliptical area being an optimum area for locating the actual mobile terminal.

15 Background and Objects of the Present Invention

The evolution of wireless communication over the past century, since Guglielmo Marconi's 1897 demonstration of radio's ability to provide continuous contact with ships sailing the English Channel, has been remarkable. Since
20 Marconi's discovery, new wireline and wireless communication methods, services and standards have been adopted by people throughout the world. This evolution has been accelerating, particularly over the last ten years, during which time the mobile radio communications
25 industry has grown by orders of magnitude, fueled by numerous technological advances that have made portable radio equipment smaller, cheaper and more reliable. The exponential growth of mobile telephony will continue in the coming decades as well, as this wireless network
30 interacts with and eventually overtakes the existing wireline networks.

Pursuant to a recent Federal Communications Commission (FCC) Ruling and Order, cellular phone service providers within the United States must provide by

-2-

October, 2001 the capability to locate the position of a cellular phone making an emergency (911) call within the provider's system to within 125 meters with at least 67% probability. In other words, the FCC requires Automatic
5 Location Information (ALI) with a radial error no greater than 125 meters for the location of a cellular phone call with 67% probability. A Public Safety Answering Point (PSAP) would then dispatch response units to the center of this circle and instruct them to search out to a
10 certain radius from the center in the event that the emergency is not immediately discernable or visibility is limited (fog, rain, intervening obstacles, etc.).

It should be understood that an optimum search area should include all regions where the chances of finding
15 the caller are good and exclude regions of poor probability. All positioning algorithms known to be currently under consideration involve locating the phone with respect to known locations of base stations or satellites. While the FCC mandate is based upon a
20 circular area, however, all the known preferred techniques predict a more elliptical, non-circular area. In other words, the errors in the known techniques are elliptical to the lowest order in the calculation, i.e., a contour of constant probability density for locating the phone is
25 an ellipse.

Nonetheless, pursuant to the FCC directive, since the equipment must satisfy a circular requirement, a circular contour presented to the user might at first glance seem to be the appropriate solution. As is understood in the
30 mathematical arts, when the coverage probability of an ellipse is known, to then calculate the probability bounded by a perfect circle, a non-trivial numerical integration is required. Alternatively, an approximation may be used. In view of the actual elliptical nature of
35 the densities, however, this integration calculation is wasteful and unnecessary and increases the time before the display is ready for the PSAPs. Worse still, if the

-3-

emergency is not immediately visible to the response units due to intervening buildings or terrain, the PSAP must provide directions as to where to search. In this case, the response units might have to search the entire circular area.

In many cases, however, particularly along the fringes of the coverage area, a circular region is such a poor approximation of the true error ellipse that emergency units may spend considerable vital time searching in the wrong places and not enough time searching in high probability density areas, which as discussed are actually elliptical in nature. Further, it has been found that a circle so formed and centered about the indicated position has as much as four or more times the area of the elliptical region, almost all of the extra area being unproductive.

It is, therefore, an object of the present invention to provide an improved system and method for indicating an optimal search area about the estimated location of a cellular phone caller within a telecommunications system.

It is a further object of the present invention that the improved system and method facilitate such search area definition pursuant to the FCC mandate, providing PSAPs with a tool to focus search, rescue and emergency efforts to a region having the highest probability of success, reducing the time required to locate the cellular phone caller.

SUMMARY OF THE INVENTION

The present invention is directed to a system and method for improving the accuracy of a location measurement within a telecommunications system. An elliptical search area is defined about the estimated mobile terminal location determined by an Automatic Location Information (ALI) technique within the telecommunications system, the elliptical area being an optimum area for locating the mobile terminal. The size,

-4-

eccentricity and orientation of the ellipse are determined by the configuration of base stations, the mobile terminal's position, and the uncertainties of the raw measurements used by the particular ALI technique.

5 A more complete appreciation of the present invention and the scope thereof can be obtained from the accompanying drawings which are briefly summarized below, the following detailed description of the presently-preferred embodiments of the invention, and the appended
10 claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram of a telecommunications system, within which the principles of the present
15 invention are implemented;

FIGURE 2 is a scatter diagram of a multiplicity of location measurements of a mobile terminal about a given locus showing circular and elliptical search areas covering the same probabilities.

20 FIGURE 3 is a diagram of a display device illustrating the elliptical search area of FIGURE 2 on equipment in FIGURE 1.

25 DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention
30 are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of
35 the invention to those skilled in the art.

With reference now to FIGURE 1 of the drawings, there is illustrated a Public Land Mobile Network (PLMN),

-5-

such as cellular network 10, within which the hybrid mobile terminal location measurement technique of the present invention may be utilized. The network 10 is composed of a plurality of areas 12, each with a Mobile Switching Center (MSC) 14 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) 20 may move freely without having to send update location information to the MSC/VLR area 12 that controls that LA 18. Each Location Area 12 is divided into a number of cells 22. Mobile Station (MS) 20 is the physical equipment, e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 10, each other and other wireline and wireless users outside the network 10. A Base Station (BS) 24 is the physical equipment, illustrated for simplicity as a radio tower, that provides radio coverage to the geographical area of the cell 22 in which to handle radio traffic to and from the MS 20.

With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26 and an MSC/VLR 14/16. The HLR is a database maintaining all subscriber information, e.g., user profiles, current serving cell location and routing information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative information. The HLR 26 may be co-located with a given MSC 14, may be an integral part of the MSC 14, or may service multiple MSCs 14, the latter of which is illustrated in FIGURE 1. The VLR 16 is a database containing information about all of the mobile stations 20 currently located within the MSC/VLR area 12.

With reference now to FIGURE 2, there is illustrated an example of a circular coverage area, referred to by the indicia C, centered about a mobile terminal 20, as shown in FIGURE 1, located at the juncture

-6-

of the X and Y axes. Also shown in FIGURE 2 are 1000 simulated measurements, represented by individual dots, with the random measurement location error provided by the particular ALI technique utilized. As is indicated, the estimated locations (per ALI) form a substantially symmetrical and elliptical statistical sample grouping about the axes. As is understood in the statistical arts, circle C is drawn to encompass about 86.5% of the probability, i.e., two standard statistical deviations. It should, however, be understood that pursuant to the FCC directive, the circle C may instead be constructed to cover a lesser fraction of the probability, e.g., the aforementioned 67%. Then the resultant radius may be compared with the FCC 125 meter requirement.

Also shown in FIGURE 2 is an ellipse E also drawn to cover 86.5% of the probability, the aforementioned two standard deviations. The circle C and ellipse E in the figure both cover the same probability and are centered at the same point. As is understood in the mathematical arts, the eccentricity (ratio of distance between foci to major axis length) of an ellipse E is larger than that of the circle C, which is 0.0. Larger eccentricity values correspond to a smaller minor axis compared with the major axis, i.e., a longer and narrower ellipse. Regarding the area of circle C shown in FIGURE 2, it is about four times the area of the ellipse E. Since a large fraction of the circle C, particularly areas away from the narrow band of measurements along the major axis of the ellipse, contains none of the simulated points (dots), as is apparent from the figure, searching these empty areas most likely would be unproductive. Further, much of this unproductive area is relatively far from the center and most likely out of view from the center due to intervening obstacles, e.g., buildings. Accordingly, valuable search time would be wasted searching such remote areas.

With further reference to FIGURE 2, the two fairly small distant ends of the ellipse E, along the major axis,

-7-

contain or are near a substantial percentage, about 13.5%, of points not covered by the circle C. Furthermore, unlike circle C, the area about the ellipse E encompassing the uncovered points is in close proximity to the elliptical covered area. Accordingly, the majority of the non-covered points will be visible from within the immediately adjacent ellipse E. With circle C, however, the excluded points are clustered in two areas and also occur at somewhat greater distances from the circle, so that a caller in those areas might take considerable time to find.

In the aforescribed manner, the system and method of the present invention replaces the crude circular approximation technique with a more accurate elliptical search region for the emergency services to focus on. The true error ellipse, with a net coverage probability specified by the PSAP or other agency, is preferably presented to the dispatcher superimposed on a map of the area. Figure 3 shows what a typical display 30 might look like. As illustrated in the figure, an elliptical area is superimposed on a street map. Responding units are initially dispatched to the center. The parameters of the covering ellipse E are determined by the ALI software using standard deviation techniques known in the statistical arts. Accordingly, the size of the ellipse E is determined by the desired probability of coverage and the standard errors in the quantities measured by the ALI. The eccentricity and orientation of the ellipse are determined by the geometry of the situation, as is understood by those skilled in the art.

In practicing the present invention, after constructing the ellipse pursuant to the desired statistical accuracy, the PSAP first directs the responding units to the center of the ellipse E, as mentioned above. If the distress caller and the emergency is not visible from that point, the dispatcher can then exhaustively direct the response units, e.g., along the

-8-

major axis of the ellipse, more efficiently in their search than if a broader circle C were used. In this manner, regions having low probability are not searched and the search is instead focused upon the elliptical region having high probability. In the example shown, the total search area is reduced by about a factor of four. It should, nonetheless, be understood that with greater elliptical eccentricities (longer and narrower ellipses), the total area may be reduced even further, better focusing searching efforts.

By virtue of the significant reduction in the amount of area to be searched per the elliptical search strategy of the present invention, search time is reduced as well, perhaps making the difference between life and death in some situations. The technique set forth in the instant application also reduces the complexity of the system, thereby speeding up the computation time, and reducing the cost of the system.

Since in the vast majority of situations a given mobile terminal 20 is randomly positioned within a non-symmetric system 10, with the base stations 24 surrounding the terminal 20 creating an irregular coverage area, the eccentricity of the ellipse E can become quite large, offering in many cases greatly increased positional accuracy compared with a circle of the same coverage probability, as discussed. It should be understood, however, that in some situations there may exist substantial symmetry of the base stations 24 around the caller. In such an event, the eccentricity of the ellipse will be closer to 0.0 and more circular in nature. Nonetheless, even in those situations, the system and method of the present invention convey the advantages of speed and simplicity in estimating the position of the mobile. This is because the ellipse of a specified coverage probability can be quickly calculated by the normal technique of least squares estimation, whereas the radius of a circle of the same coverage probability is a

-9-

tedious computation that must begin with the parameters of the ellipse as determined by the least-squares technique.

5 Although a minimum of 67% accuracy is now prescribed by the FCC, the present invention may employ higher measures of accuracy to better locate a mobile caller. It should, therefore, be understood that an accuracy of n standard deviations may be utilized as another parameter.

10 It should further be understood that the principles of the present invention may be utilized in a number of contexts. As noted, the search focusing techniques may not only be incorporated into an enhanced 911 service to enable Public Service Answering Points to locate the scene
15 of an emergency, but may also be used in the location of stolen vehicles and fraud perpetrators, location of cellular calls being made during the commission of a crime or by perpetrators following a crime, and any other location-sensitive application.

20 It should also be understood that the principles of the present invention are applicable for any ALI technique, e.g., angle of arrival, time difference of arrival, timing advance and other such methodologies for locating mobile terminals
25 within a telecommunications system.

30 The previous description is of a preferred embodiment for implementing the invention, and the scope of the invention should not necessarily be limited by this description. The scope of the present invention is instead defined by the following claims.

-10-

WHAT IS CLAIMED IS:

1. A method for determining an elliptical position estimate of a mobile terminal communicating within a radiocommunication system, said method comprising the steps of:

receiving, at a multiplicity of base stations, a signal transmitted by said mobile terminal;

forwarding, by each of said multiplicity of base stations, said received signal and Automatic Location Information (ALI) data to a central processing center; and

calculating, within said central processing center, said elliptical position estimate of said mobile terminal from said ALI data.

2. The method according to claim 1, further comprising the step of:

displaying said elliptical position estimate on a display device, said estimate overlaying a terrain map.

3. In a telecommunications system employing a multiplicity of base stations, a mobile terminal being in wireless communication with said base stations, circuitry within a central processing center of said telecommunications system for determining an elliptical position estimate of said mobile terminal therein, said circuitry comprising:

calculation means, within said central processing center, for determining said elliptical position estimate of said mobile terminal; and

display means, attached to said control processing center, for displaying said elliptical position estimate.

FIG.1

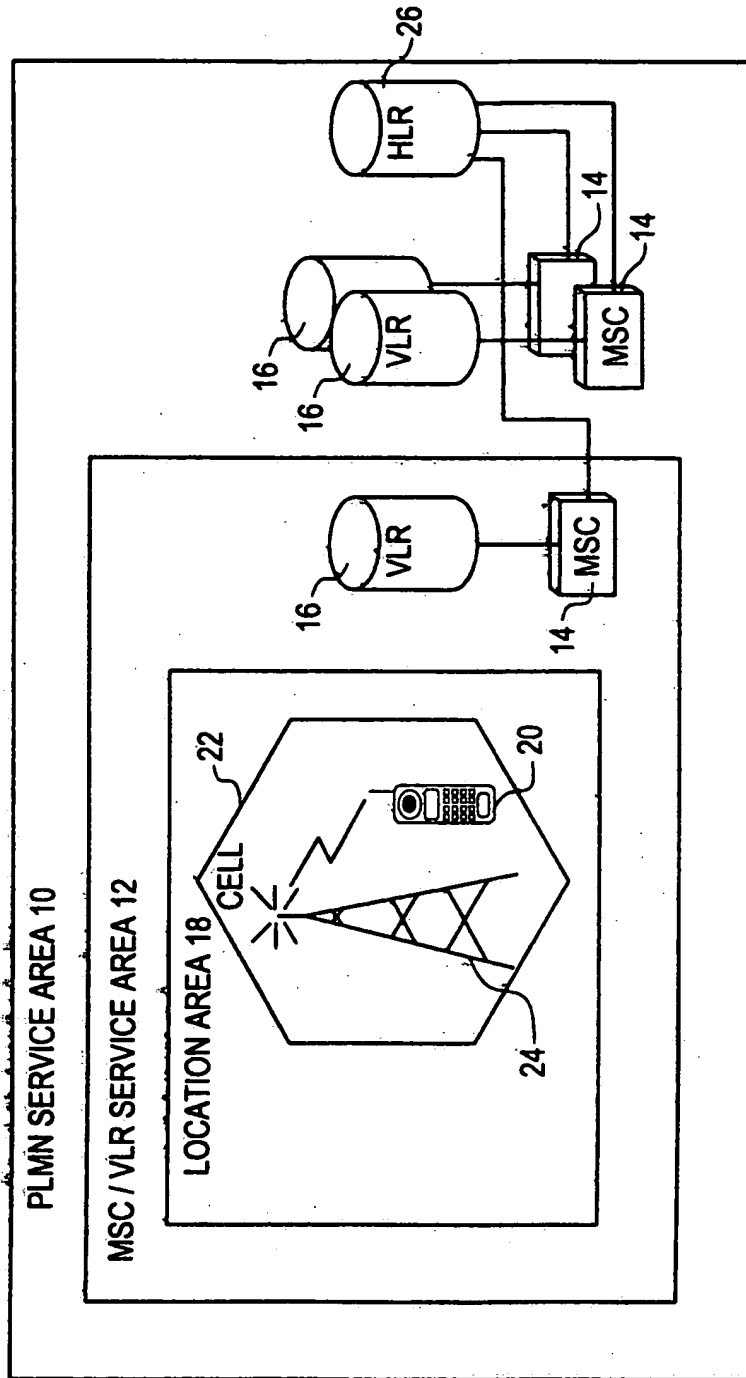


FIG. 2


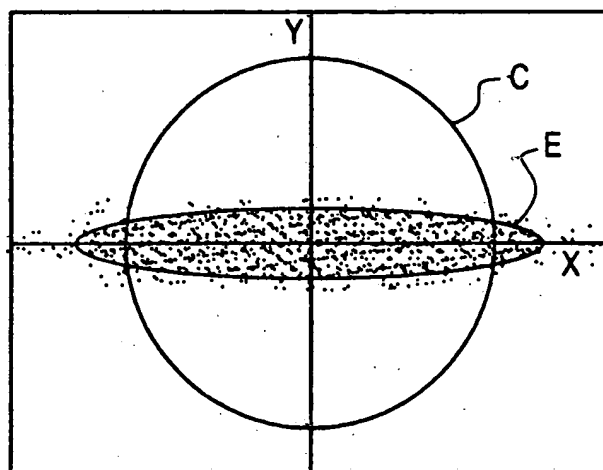


FIG. 3

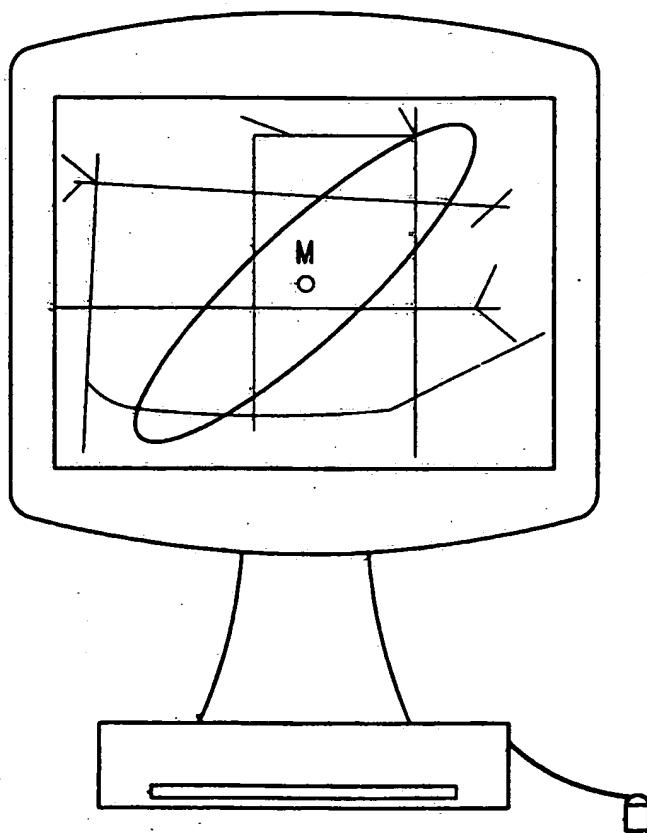

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/US 98/15941

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/38 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 629 707 A (HEUVEL DEAN P V ET AL) 13 May 1997 see column 2, line 50 - line 61 see column 5, line 33 - line 41 see column 6, line 31 - column 7, line 5 see column 7, line 23 - line 27 see column 7, line 43 - line 50 see column 8, line 19 - column 11, line 40 ---	1-3
X	US 5 327 144 A (STILP LOUIS A ET AL) 5 July 1994 see column 6, line 41 - column 7, line 50 see column 8, line 63 - column 9, line 38 see column 15, line 54 - column 17, line 3 see column 17, line 22 - line 26 see column 18, line 1 - column 19, line 2 see column 19, line 23 - line 29 --- -/--	1-3

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 November 1998

Date of mailing of the international search report

19/11/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Gerling, J.C.J.

INTERNATIONAL SEARCH REPORT

Inte. Application No.
PCT/US 98/15941

C.(Continuation) DOCUMENTS CONSIDERED-TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 5 444 450 A (OLDS KEITH A ET AL) 22 August 1995. see column 2, line 41 - column 3, line 10 see column 8, line 58 - line 65 see column 10, line 28 - column 12, line 49 see column 13, line 8 - column 14, line 36</p>	1
A	<p>US 5 602 903 A (LEBLANC FREDERICK W ET AL) 11 February 1997 see column 7, line 42 - column 8, line 48 see column 9, line 34 - line 45 see column 23, line 33 - column 24, line 32 see column 26, line 14 - column 27, line 22 see column 27, line 41 - column 28, line 10 see column 30, line 45 - line 49 see column 32, line 63 - column 33, line 3</p>	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

Info. Application No-

PCT/US 98/15941

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5629707	A	13-05-1997	AU 4285196 A CA 2209007 A DE 19581884 T GB 2312802 A WO 9621162 A	24-07-1996 11-07-1996 04-12-1997 05-11-1997 11-07-1996
US 5327144	A	05-07-1994	AT 165169 T AU 677292 B AU 6094094 A AU 6820694 A BR 9406463 A CA 2161333 A,C DE 69409645 D DE 69409645 T EP 0700525 A JP 8508381 T SG 48730 A WO 9427160 A WO 9427161 A US 5608410 A ZA 9401019 A	15-05-1998 17-04-1997 12-12-1994 12-12-1994 30-01-1996 24-11-1994 20-05-1998 06-08-1998 13-03-1996 03-09-1996 18-05-1998 24-11-1994 24-11-1994 04-03-1997 25-08-1994
US 5444450	A	22-08-1995	NONE	
US 5602903	A	11-02-1997	US 5768686 A	16-06-1998